

Interactive screen

Specification W-E Series Android 14 V100.G




Android 14



windows optional



4K Resolution



Zero gap



SHARE WITH
AIR GO CAST




camera optional



Bluetooth



Anti-Glare
Glass

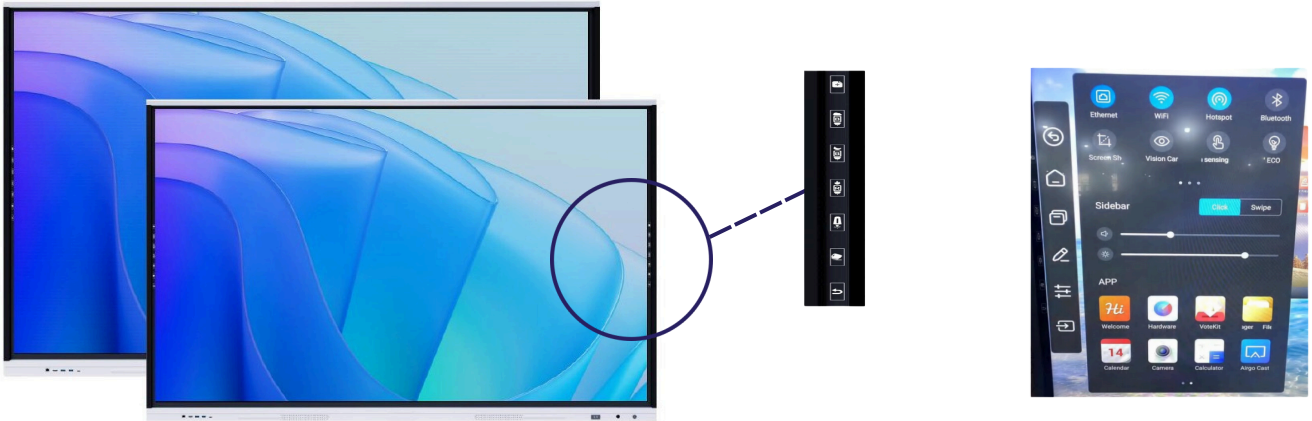

Floating tool bar, side bar and physical hotkeys provide quick access to system/software Available size 65"/75"/86"

- **Multi-point Touch Ultra-fine Writing**

- The ultra-thin stylus offers an incredibly smooth and natural writing experience like a traditional pen.
- However, it outperforms old-school writing by identifying two touch objects with different touch sizes and configuring different colors for each. You can even change the color of either one without affecting the other!
- 40 -point touch 20-point writing
- Two color writing simultaneously
- Up to four-split screen



- **Luxurious Visuals**

- employs 4K ultra HD resolution and anti-glare tempered glass to deliver astonishing lifelike visuals for every audience in the room.
- 4K UHD Display
- 4mm Tempered Glass 178° Viewing Angle
- **Wireless screen sharing across various systems**



KALBOARD®

Educational, Visual & Business Aids Producers

Specification W-E Series Android 14 V100.G				
Display	Model no.	WX-WB06524H	WX-WB07524H	WX-WB08624H
	Bonding	zero-gap	zero-gap	zero-gap
	Size	65 inch	75 inch	86 inch
	Backlight	D-LED	D-LED	D-LED
	Display area (mm)	1428.48(H)x803.52(V)	1649.664(H)*927.936(V)	1895.04(H)*1065.96(V)
	Aspect Ratio	16:9	16:9	16:9
	Viewing Angle(V/H)	178°	178°	178°
	Brightness	450nits	450nits	450nits
	Contrast ratio	4000/1	4000/1	4000/1
	Colors	1.07B(10 bits)	1.07B(10 bits)	1.07B(10 bits)
	Resolution	3840*2160	3840*2160	3840*2160
	Refresh Rate	60HZ	60HZ	60HZ
	Response time	< 7ms	< 7ms	< 7ms
	Glass	4mm, Anti-Glare, tempered, explosion-proof, Mohs7		
	Lifetime	≥80,000h		
Android	Mainboard	V100.G	V100.G	V100.G
	Chip	GOKE 6780	GOKE 6780	GOKE 6780
	CPU	8*A55	8*A55	8*A55
	GPU	Mali-G52*4	Mali-G52*4	Mali-G52*4
	RAM	4G/8G DDR4	4G/8G DDR4	4G/8G DDR4
	ROM	32G/128G	32G/128G	32G/128G
	Android version	14	14	14
Touch	Touch points	40points	40points	40points
	Writing points	20points	20points	20points
	Minimum Touch Object	2mm	2mm	2mm
	Precision	±1mm	±1mm	±1mm
Buttons	Front buttons	Eye protect/Setting/Return/Source/Home/V-/V+/Power		
Front interface	Touch-USB	1 Type-B	1 Type-B	1 Type-B
	HDMI IN	1	1	1
	USB-C	1 (5V/1A)	1 (5V/1A)	1 (5V/1A)
	USB (Dual Channel)	2	2	2
Rear interface	RS232	1	1	1
	Line out	1	1	1
	HDMI out	1	1	1
	Coax	1	1	1
	Mic In	1	1	1
	RJ45 IN	1	1	1
	HDMI IN	2	2	2
	Touch USB-B 2.0	1	1	1
	USB-A 2.0 (Android)	2	2	2
	TF Card	1	1	1
Wifi & BT	WIFI & Bluetooth	2.4G+5G / BT 5.0	2.4G+5G / BT 5.0	2.4G+5G / BT 5.0
Speakers	Speakers	16W*2, optional for 20W*1 sub-woofer		
Power consumption	Power consumption	≤300W (max)	≤430W (max)	≤550W (max)
	Standby	≤0.5W	≤0.5W	≤0.5W
	Working voltage	100-240V~ 50/60Hz	100-240V~ 50/60Hz	100-240V~ 50/60Hz
Dimension	Physical dimension(mm)	1488.7*895.3*94.1	1710.8*1018.9*94.1	1957*1158.6*94.1
	Packed dimension(mm)	1626*1036*210	1848*1159*210	2094*1299*210
	NW / GW	43±1KG / 55±1KG	55±1KG / 69±1KG	69±1KG / 89±1KG
Warranty	3 years standard warranty			
In The Box	Pen*2 / Power cable*1(3 meters) / HDMI cable* (3 meters) / USB cable*1(A -A, 3 meters)/Manual*2 /Wall mount*1			
Certification	CE-EMC / CE-LVD / CE-RED / Rohs / CB/ FCC			